



Product Description:

Utilizing the latest generation of LED chips, this uniquely designed wall pack delivers a similar light output to a 150 /200 W metal halide but with only 1/3 energy consumption. Housing made of die-casting aluminum with reliable powder coating specifically for harsh outdoor environment. It is attractive in appearance and performance.

Optional mounting and Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Die-cast aluminum body

LEDS

New generation COB technology

FINISH

UV stabilized powder coated finish

LENS

Heat and impact resistant borosilicate glass


OPTIONS

Optional 347V with adder


Finish - Bronze. Color option with adder

Optional wire guard / visor with adder

Available Options




Wire Guard




Visor

Line Drawing



Dimensions

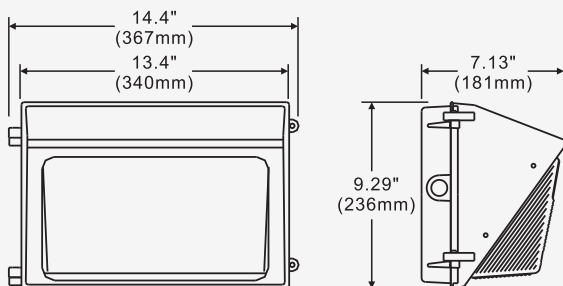

Specification

Model No.	1ST-WP		
System watts	40	53	75
Lumen Output	4303 lm**	5594 lm**	9471 lm**
Color	5000K		
MA	950 MA	700 MA	950 MA
Input Voltage	120~277V		
CRI	70+		
Starting Temp	-40°C		
Equivalent	100W MH	100W-150W MH	250W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.