


FULL CUT OFF LED WALL PACK 5,000 to 10,000 LUMENS

Product Description:

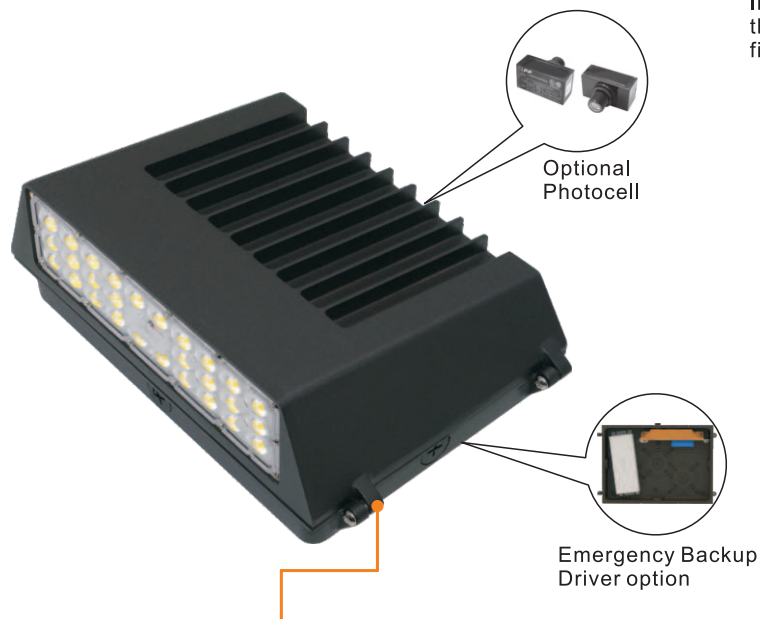

Door Frame
The door frame is designed with the installer in mind. It has a simple to use hinge access, allowing installers to be hands-free when entering electrical compartment. This saves time and money.

Integrated Heatsink
Integrated cooling fin provides excellent thermal dissipation. This design allows the fixture to have extremely long lifetime hours.



Proprietary Optical Control
Specifically designed lens for freedom of layout design without any restraint. These optics are engineered for maximum light output.

Product Description:

The 1ST-WP-FC is a powerful luminaire that has been designed to meet a wide variety of locations. With the various mounting options it can be used as a flood light or as an area light. With the LEDs mounted on the large heatsink, the fixture can maintain a high lumen output while keeping the LED modules at a cool temperature.

Optional Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Heavy duty die-cast aluminum powder coating, corrosion resistant hardware

FINISH

UV stabilized powder coated finish

LENS

Heat and impact PC Lens

OPTIONS

Wide / narrow distribution available with adder
Finish - Bronze. Color option with adder

Performance Data

Model NO.	System Watts	Lumens	LPW
1ST-WP-FC	41W	5539 lm**	135 lm/w
	63W	9044 lm**	143 lm/w
	76W	10420 lm**	137 lm/w

Specification:

Example:LED-3110

Model No.	System Watts	Input Voltage	CRI	Color Temp	Distribution	Option	Finish	Starting Temp
						Accessories		
1ST-WP-FC	41=41W 63=63W 76=76W	UNV=120-277V	7=70+	40=4000 K 50=5000 K	T3=Type III T4=Type IV	PE=Photocontrol EM=Emergency Driver	BZ=Bronze	-40°C

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Dimension:

