



DID Series

HEX 24" INDIRECT LUMINAIRE

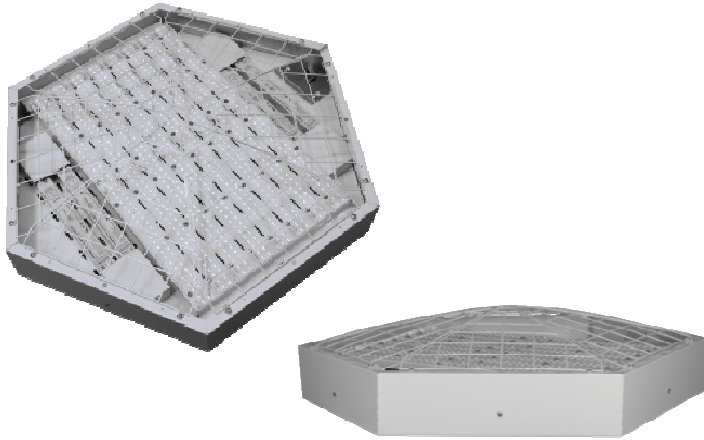

Fixture Dimensions: 29.56" x 25.68", Depth: 5", 22 lbs.

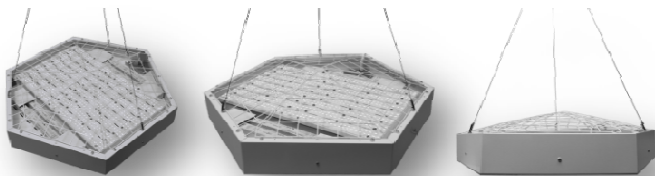

3 Point Hanging Mount Option

Project	
Type:	Approved By:

APPLICATIONS

Indirect high bay lighting environments, warehouse and production areas, indoor court lighting, gymnasiums, field houses and sports bubbles.

CONSTRUCTION

.032" aluminum internal frame with .040" white pre-painted aluminum housing, optional .063" steel wire cage. All fixtures are made in the USA.

MOUNTING

3 point hanging cables, swivel bracket, pendant, (.50" or .75") or strut. Please consult factory for or custom mounting options.

SYSTEM SPECIFICATIONS

High flux linear LED modules: 80+ CRI, CCT: 3500K, 4000K or 5000K. Constant current LED power supplies: power factor > 0.9, THD < 20%, universal voltage 120-277v, 347-480v available.

DIMMING & CONTROLS

0-10v, dim to off or step. Wireless control by remote switch or IP protocol from PC and/or hand held device (consult factory).

RATINGS & WARRANTY

Temperature rated from -34°C to 50°C (-30°F to 122°F), service life > 83,000 hours (L70), CSA listed for indirect mounting, DLC listed, BA compliant. Five (5) year product warranty. Consult factory for warranty in clay courts.

Wattage	Wire Cage	Lumens	LPW
386	No Wire Cage - Open	61,130	158
386	With Wire Cage	57,462	149

Ordering Information

DID	HEX24I	8400				
Series	Family	Part ID	CCT	Voltage	Wire Cage	Mounting
1st Source LED Direct/Indirect	Hexagonal 24" Indirect	8400	35K = 3500K 40K = 4000K 50K = 5000K	U = 120-277V 3 = 347V 4 = 480V	WC = Wire Cage	3P = 3 Point Hanging Kit ST = Strut Mount SB = Swivel Bracket P = Pendant Mount Specify .5 or .75 Pendant Size
Controls	Cord & Plug					
DO = Dim to Off D10 = Dim to 10% Consult Factory for Wireless Controls	C = Cord Specify Length P = Plug Specify NEMA					

