

## 2x4 Pickleball Court Light with Panel Light Appearance



Model	Lumen ID	Wattage	Delivered Lumens	LPW
RCxx24	26000	191	26,500	139

### Ordering Information

RSD-RCxx24	Lumen ID	CCT	Lens	Voltage
RSD-RCSM24 = Surface/Chain Mount	26000	40K	D92 = Diffused Acrylic	U = Universal 120-277v
RSD-RCFM24 = Recessed Frame Out	Consult Factory For Additional Lumen Packages	50K		3 = 347v (Consult Factory)
RSD-RCTB24 = Recessed T-Bar Lay-In				4 = 480v (Consult Factory)
Mounting Options	Dimming & Controls	Accessories		
Lay In or Frame Out No Designation Required	D0 = Dim to Off D10 = Dim to 10% DLV = Dim by Line Voltage MS = Motion Sensor	C = Cord (Specify Length) P = Plug (Specify NEMA) EQ = Seismic Anti Sway Clips EM/2300 = EM Driver 2300 Lm EM/2900 = EM Driver 2900 Lm		
SM/CC = Universal Surface or Chain Mount	Consult Factory For Wireless Control Options			

Project	
Type:	Approved By:

### APPLICATIONS

High output 2x4 court light with a smooth, even panel light appearance. Non glare with even distribution for competitive play.

### CONSTRUCTION

.032" white pre-painted aluminum housing, D92 diffused high impact polycarbonate lens. All fixtures are manufactured in the USA.

### MOUNTING

Lay-In for t-bar grid ceiling or universal mounting for surface, chain or cable. Suspension brackets included

### SYSTEM SPECIFICATIONS

High flux linear LED modules: 80+ CRI, CCT: 3500K, 4000K or 5000K. Constant current LED power supplies: power factor > 0.9, THD < 20%, universal voltage 120-277v, 347-480v available.

### DIMMING & CONTROLS




Optional wireless dimming may be controlled by a remote switch, PC or handheld device. Standard dimming options are 0-10v low voltage (10%), dim to off (0%) or dim by line voltage.

### RATINGS & WARRANTY




Temperature rated from -20°C to 50°C (-4°F to 122°F), service life > 100,000 hours (L90), CSA listed, 5 year product warranty.

**DIMENSIONS: Pickleball Court 2x4 (PA)**




**RCSM24 Universal Surface or Chain Mount**

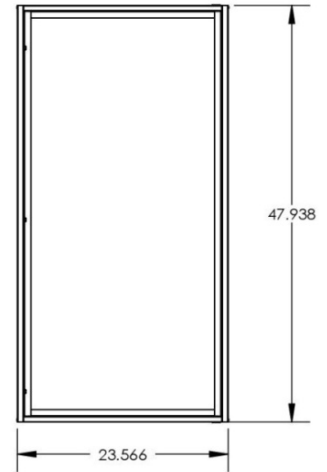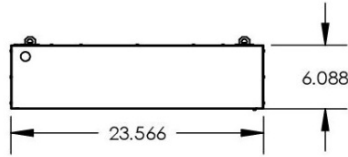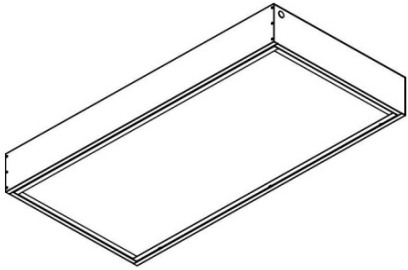

**RCFTB24 Recessed Lay-In for T-Bar Grid Ceiling**

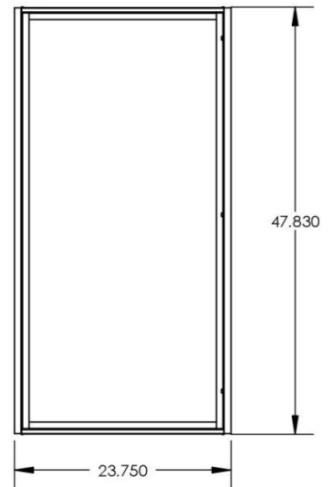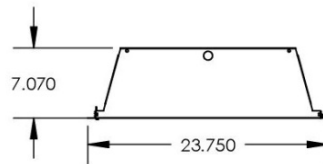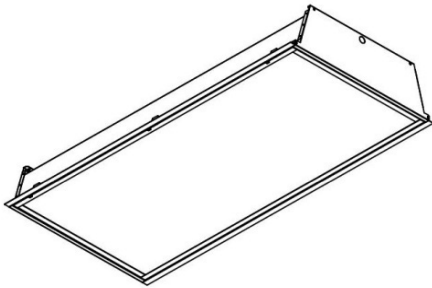

**RCFM24 Recessed Frame Out for Hard Ceiling**

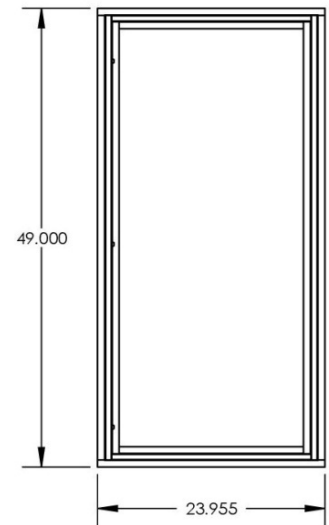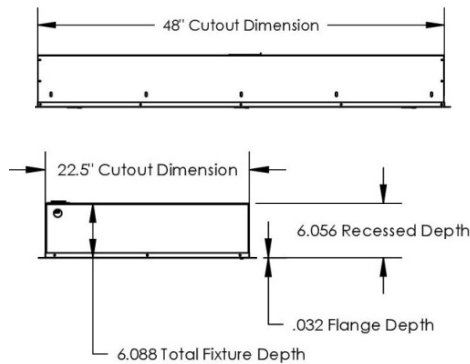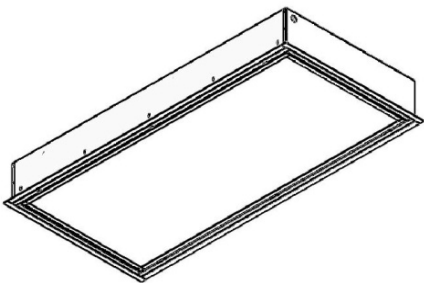

Made in the USA

