

COMPACT 35W GENERAL-PURPOSE LED FLOOD LIGHT



35W, 120-277V Input

PRODUCT FEATURES

- Uniform, wide flood design (NEMA 7h x 7w distribution pattern)
- Heavy-duty, die cast aluminum housing featuring built-in glare visor and tempered glass lens
- Powered by 0-10V dimming LED drivers
- CCT Selection: Adjustable CCT (3000K, 4000K, or 5000K)
- Built-in dusk-to-dawn photocell behind translucent 3/4" threaded plug with anti-yellowing agent
- Heavy-duty 1/2" knuckle mount with 90° adjustment and yoke mount options included
- Ambient operating temperature: -30°C/-22°F to 45°C/113°F
- UL listed for wet locations, IP65
- 0-10V dimming, 10% min
- Power Factor: >0.95
- THD: <20%
- LED chip lifetime: L70 >100,000 hrs @ 25°C/77°F ambient fixture temp
- Meets FCC Part 15, Part B, Class A standards for conducted and radiated emissions
- 18" input cable, pre-stripped
- Fixture impact rating IK07



10 YEAR
LIMITED WARRANTY


ELECTRICAL SPECIFICATIONS

Catalog Number	Wattage	Lumens	Dimming	CCT*	Efficacy	CRI	Housing Color	Mounting	Input Voltage	Rated Life	Legacy Equivalent
1ST-CSFLD-35CS-U-D0	35W	4480 lm	0-10V	3000K	128 lm/W	>80	Bronze	Universal: 1/2" Knuckle or yoke	120-277V	50,000 hrs	150-175W MH
		5075 lm		4000K	145 lm/W						
		4900 lm		5000K	140 lm/W						


* Color Uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017

PHOTOMETRIC SPECIFICATIONS

ISOCANDELA PLOT

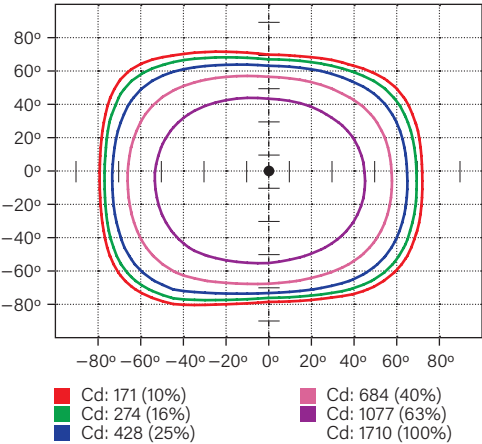

LUMINOUS INTENSITY DISTRIBUTION

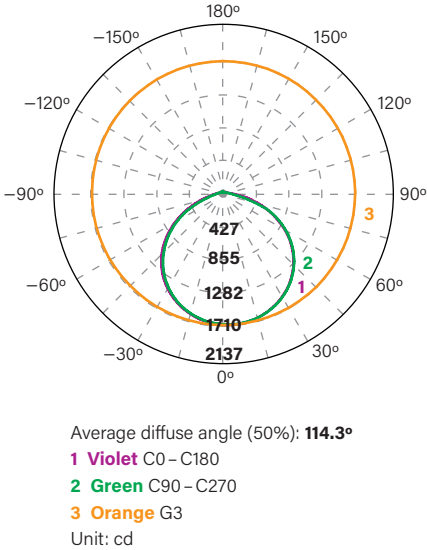

FLUX DISTRIBUTION


Zone	Lumens	% Luminaire
Forward Light	2,527 lm	53.2%
0°–30°	675 lm	14.2%
30°–60°	1,366 lm	28.8%
60°–80°	471 lm	9.9%
80°–90°	15 lm	0.3%
Back Light	2,181 lm	46.0%
0°–30°	656 lm	13.8%
30°–60°	1,223 lm	25.8%
60°–80°	297 lm	6.3%
80°–90°	5 lm	0.1%
Up Light	39 lm	0.8%
90°–100°	2 lm	0.0%
100°–180°	36 lm	0.8%

BUG* Rating	
Asymmetrical Luminaire Types	
Type I, II, III, IV	B2 U2 G1
Quadrilateral Symmetrical Luminaire Types	
Type V, Area Light	B2 U2 G1


* Backlight, Uplight, Glare

LIGHT DISTRIBUTION PATTERNS (Isometric view from above)


Building exterior mounted at 15',
30° below horizontal

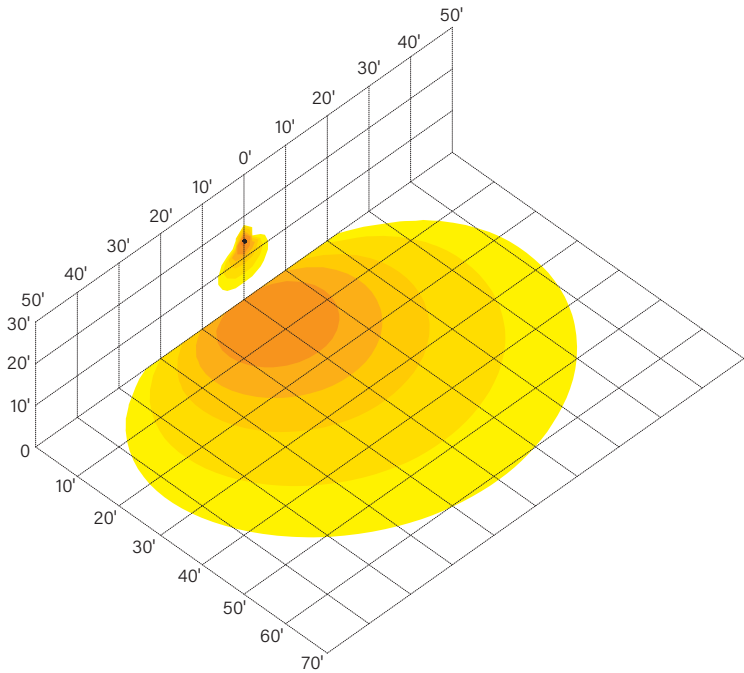

Ground mounted at 6" above ground,
10° above horizontal, shining towards building exterior
wall at 14' away

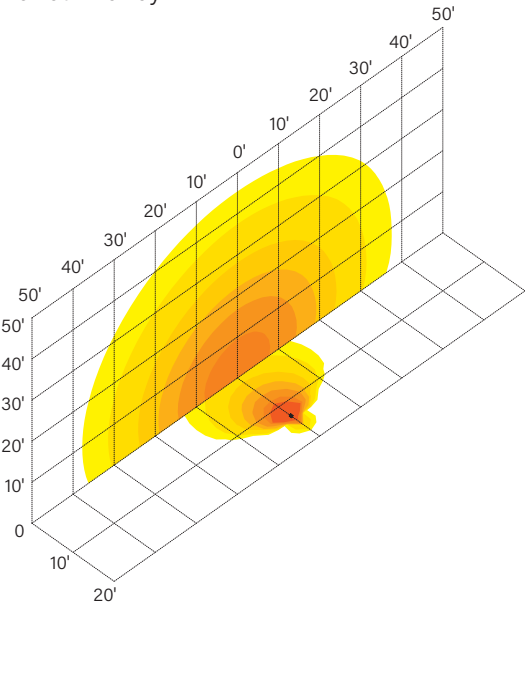


PHYSICAL SPECIFICATIONS

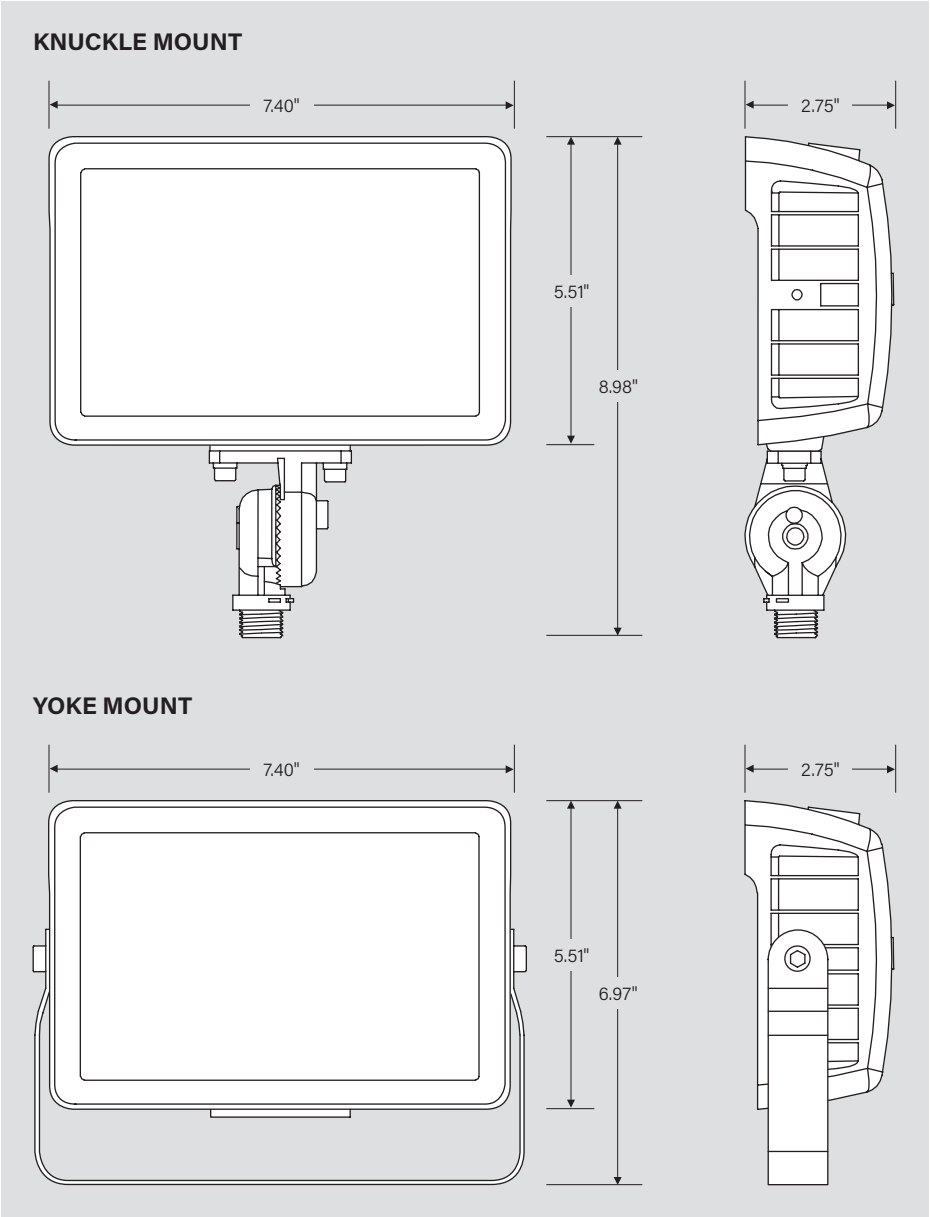

Specifications subject to change. Last revised on 2/27/24

GENERAL SETUP INSTRUCTIONS

GENERAL WIRING DIAGRAM

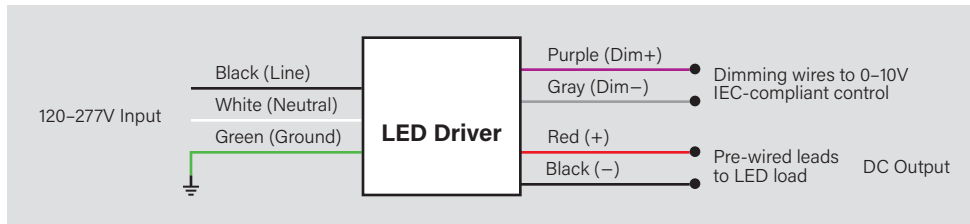

Caution: Before installing, make certain that AC power to the fixture is off.


Caution: The electrical rating of this product is 120-277V. Installer must confirm that there is 120-277V at the fixture before installation.

PHOTOCELL ENABLE / DISABLE

This fixture is equipped with a dusk-to-dawn photocell behind the translucent knock-out (KO) cover. Adjust the dip switch to enable (ON) or disable (OFF) the photocell function (see illustrations to the right). Fixture comes preset with photocell enabled unless otherwise noted.

(CCT) ADJUSTMENT

This fixture is equipped with CCT Selection. There is an adjustable dip switch behind the translucent knock-out (KO) cover to change CCT between 5000K, 4000K, and 3000K (see illustrations to the right). Fixture comes preset at 5000K unless otherwise noted.

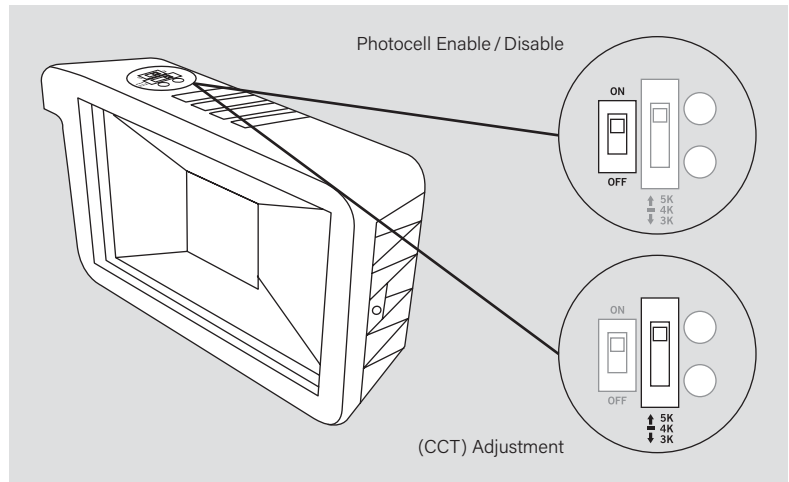

ACCESSORIES (SOLD SEPARATELY)

CORD SETS

Factory-Installable OR Field-Installable (field-installable options must be purchased separately)

✓	CATALOG NUMBER	DESCRIPTION
	KT-CS-515P-6-18/3	Cord set; 125V NEMA 5-15P; straight blade plug; 6' SJTOW cable; 18/3 wire

MOUNTS AND BRACKETS

Field-Installable (field-installable options must be purchased separately)


✓	CATALOG NUMBER	DESCRIPTION
	KT-FLED-SM-1-KIT	Surface Mount / Wall Mount Kit for Series 1 Flood Lights. Fits 15W thru 60W fixtures. Includes Mounting Hardware. Standard Bronze Housing
	KT-FLED-RC-4	Round Cover Plate for mounting Floodlights on 4" Round boxes. Includes Mounting Hardware. Standard Bronze Color
	KT-FLED-WG-2-KIT	Wire Guard for 35W Rectangular Series 1 LED Floodlight
	KT-FLED-SF-1-KIT	Slip Fitter Mount Adaptor for 15W, 35W, and 60W Rectangular Series 1 LED Floodlight. Bronze



Surface Mount / Wall Mount Kit
KT-FLED-SM-1-KIT



Round Cover Plate
KT-FLED-RC-4



Wire Guard
KT-FLED-WG-2-KIT



Slip Fitter Mount Adaptor
KT-FLED-SF-1-KIT

